


强化地板压机

Laminated flooring press

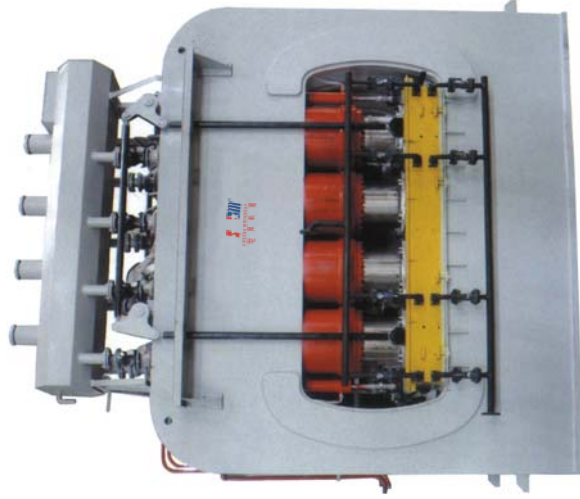

1400T-2800T快速贴面热压机主要适用于中高档强化地板的三聚氰胺纸贴面, 1400T-1800T主要适合压光面地板, 如亮光面、哑光面以及麻面等; 2000T-2800T主要适合压V型槽, 手抓纹等表面纹路生动的高档复合地板。

1400T-2800T short cycle hot press is mainly used in high-grade laminated flooring, 1400T-1800T is mainly suitable for pressing smooth flooring, such as the glossy, matt, S.F. etc.; 2000T-2800T is mainly for high-grade laminated flooring, such as V groove, hand scratch pattern. etc.

热压机模板 press plate




技术参数 Technical Date

型号/Type	总压力/Total pressure(KN)	油缸直径/Diameter of the main oil cylind (mm)	油缸数量/Quantity of the main oil cylind	热压机尺寸/Hot planten size
SBVJ-LF2400	2400	φ400	8	4'×8'、4'×9' / 5'×10'、6'×8' / 6'×9'、7'×9'
SBVJ-LF2800	2800	φ420	8	4'×8'、4'×9' / 5'×10'、6'×8' / 6'×9'、7'×9'
SBVJ-LF3200	3200	φ440	8	4'×8'、4'×9' / 5'×10'、6'×8' / 6'×9'、7'×9'


模压门压机

Door skin hot press

模压门皮 Molded door skin

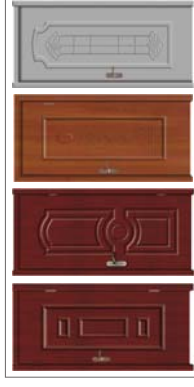

橱柜门皮 Cabinet door skin

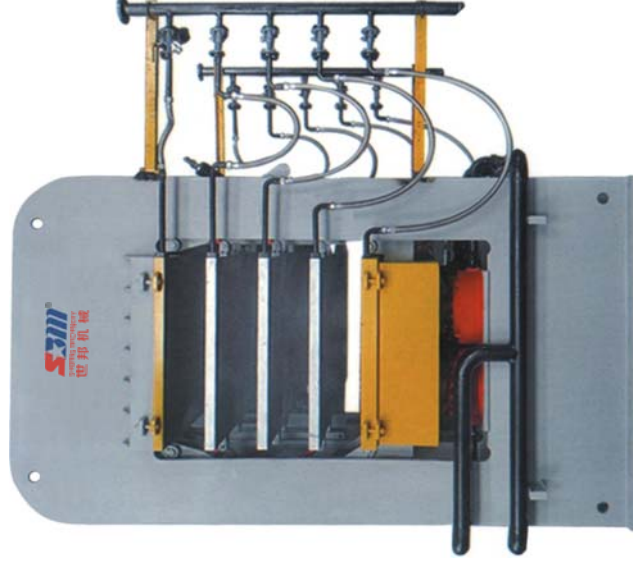

门压机适用于三聚氰胺门皮, 天然木皮门皮的模压贴面成型, 压机采用弹簧式同步闭合机构, 可根据生产工艺在任何位置停止(即限位控制), 且停留时间可调, 减少了最低层和最高层受压时间差, 更好的保证产品的质量。其保压时间以及压力设定好之后可自动控制, 压贴可以采用一次压贝占成型或者两次压贴成型, 后者的效果要更好一点。

Door skin hot press is suitable for melamine door skin, natural veneer door skin. The synchronizer is human oriented design which let the hot platens can be stopped at any position. (i.e. limit control), and the residence time is adjustable, it can reduce the compress ion time difference between the lowest layer and top layer, so that, it can better ensure product quality. The time of the pressure and the pressure value can be automatically set&controlled.

技术参数 Technical Date

型号/Type	总压力/Total pressure(KN)	油缸直径/Diameter of the main oil cylind (mm)	油缸数量/Quantity of the main oil cylind	模压尺寸/ size
SBVJ-DS700	7000	φ280	6	3'×7'、4'×8' or customized
SBVJ-DS900	9000	φ280	6	3'×7'、4'×8' or customized
SBVJ-DS1200	12000	φ320	6	3'×7'、4'×8' or customized
SBVJ-DS1400	14000	φ340	8	3'×7'、4'×8' or customized