



上置式单贴面压机 Single veneer hot press with overhead oil cylinder

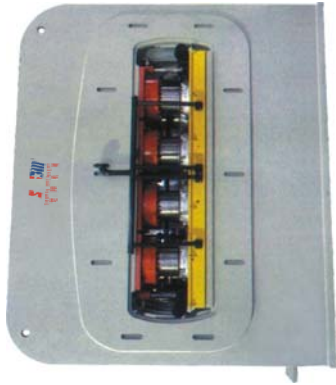

单贴面压机适用于单面装饰板，一次压贴一面，分为油缸上置式设计和油缸下置式设计。上置式单贴面压机的油缸置于上方，压板时油缸运动方向为由上向下。下置式单贴面压机的油缸置于下方，压板时油缸运动方向为由下向上。单贴面压机整体设计简约，因此设备成本低，属于压机类别里最经济实惠的产品。该系列压机主要用于亮光、哑光、麻面和浅浮雕等各种家具装饰板的压贴成型。主要用于单面装饰板，尤其广泛用于薄板的压贴。

This kind of press is suitable for single veneer decoration board. It can be divided into two styles by the position of the main oil cylinder, one is overhead style, another is underneath style.

Single veneer hot press overall design simple, so the cost of equipment is low, belong to the most cost-effective products of all the hot presses. This series of machine is mainly used for glossy, matte, S.F. and flowers textures, and it is used for furniture decorative boards. It is mainly used in the single side laminated board, in particular, it is widely used in the thin boards.



技术参数 Technical Data

型号/Type	总压力/Total pressure(KN)	油缸直径/Diameter of the main oil cylind (mm)	油缸数量/Quantity of the main oil cylind	热压板尺寸/Hot planter size
SBVJ-SD1200	1200	Φ320	6	4'×8'、4'×9'、5'×8'
SBVJ-SD1400	1400	Φ340	6	4'×8'、4'×9'、5'×8'
SBVJ-SD1600	1600	Φ320	8	4'×8'、4'×9'、5'×8'
SBVJ-SD1800	1800	Φ340	8	6'×8'、6'×9'、7'×8'



下置式单贴面压机 Single veneer hot press with underneath oil cyl inder



技术参数 Technical Data

型号/Type	总压力/Total pressure(KN)	油缸直径/Diameter of the main oil cylind (mm)	油缸数量/Quantity of the main oil cylind	热压板尺寸/Hot planter size
SBVJ-D700	7000	Φ250	6	4'×8'、4'×9' or customized
SBVJ-D900	9000	Φ280	6	4'×8'、4'×9' or customized
SBVJ-D1200	12000	Φ320	6	4'×8'、4'×9' or customized
SBVJ-D1400	14000	Φ340	6	4'×8'、4'×9' or customized
SBVJ-D1800	16000	Φ320	8	4'×8'、4'×9' or customized

双贴面压机 Double veneer hot press

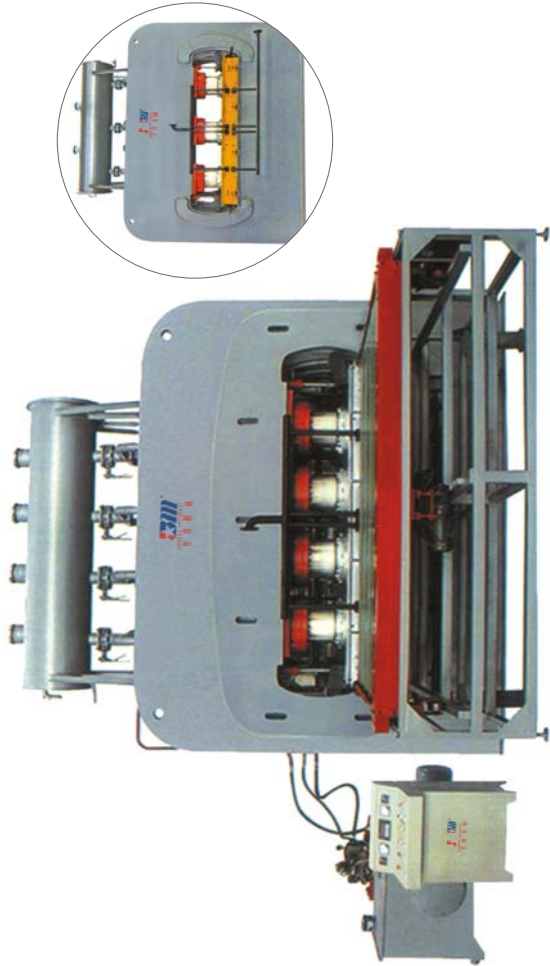

双贴面热压机主要用于双面装饰板，一次压贴正反两面，且油缸一般为上置式设计，同时配备进板小车，为我司生产效率最高的一款产品，也是市场上使用最为广泛的压机。双面贴热压机的主要特点是效率高，速度快，人工省，寿命更长。改进后的压机框架更合理，增加了强度和抗疲劳寿命，使框架寿命更持久。同时主框架采用CNC数控加工，降低因疲劳引力引发框架断裂的风险。新型的双贴面压机具有更好的保温隔热效果，更稳定更快速的液压系统。

Double veneer hot press machine is mainly used for double faced decorative board. and the main oil cylinder is overhead style. It is very popular production in the woodworking machinery market. The main characteristics of this kind hot press is high efficiency, high speed, saving labor cost, a longer using life. the improved, compresor frame is more reasonable, Which increases the strength and using life of the frame. and makes the frame more durable. At the same time, the main frame is made by CNC processing, it shall reduce the risk of stress caused by the fatigue crack. the new type of double veneer hot press has better insulation effect, more stable and more fast hydraulic system.

技术参数 Technical Data

型号/Type	总压力/Total pressure(KN)	油缸直径/Diameter of the main oil cylind (mm)	油缸数量/Quantity of the main oil cylind	热压板尺寸/Hot planter size
SBVJ-1200	1200	Φ320	6	4'×8' or customized
SBVJ-1400	1400	Φ340	6	4'×9'、5'×8' or customized
SBVJ-1600	1600	Φ320	8	4'×9'、5'×8' or customized
SBVJ-1800	1800	Φ340	8	6'×8'、6'×9' or customized
SBVJ-2000	2000	Φ360	8	6'×9'、7'×9' or customized
SBVJ-2200	2200	Φ380	8	6'×8'、6'×9' or customized
SBVJ-2400	2400	Φ400	8	7'×8'、6'×12' or customized